

Type SU Wall Shutter



P.O. Box 2300 Jacksonville, Florida 32203
 Phone: (904) 389-3646
 Fax: (904) 387-3449 • (904) 381-7560
 E-mail: fans@coolair.com
 Internet: www.coolair.com

Standard Features

- Aluminum frame and blades
- Plated steel blade reinforcements
- Nylon bushings
- Plated steel blade pivot pins
- Automatic or motor operated
- Felt seal between blades

Abbreviations for Accessories


(list on fan submittal sheet)

- DL – Delay switch
 E – Motor operated (specify voltage)

Dimensions

Dimension "A" is overall shutter width and height including flanges on all four sides. Width of the flange is $1\frac{5}{8}$ ".

Dimension "B" is the shutter frame width and height without flanges. To recess Type SU shutter, the wall opening must equal B plus $\frac{1}{4}$ ".

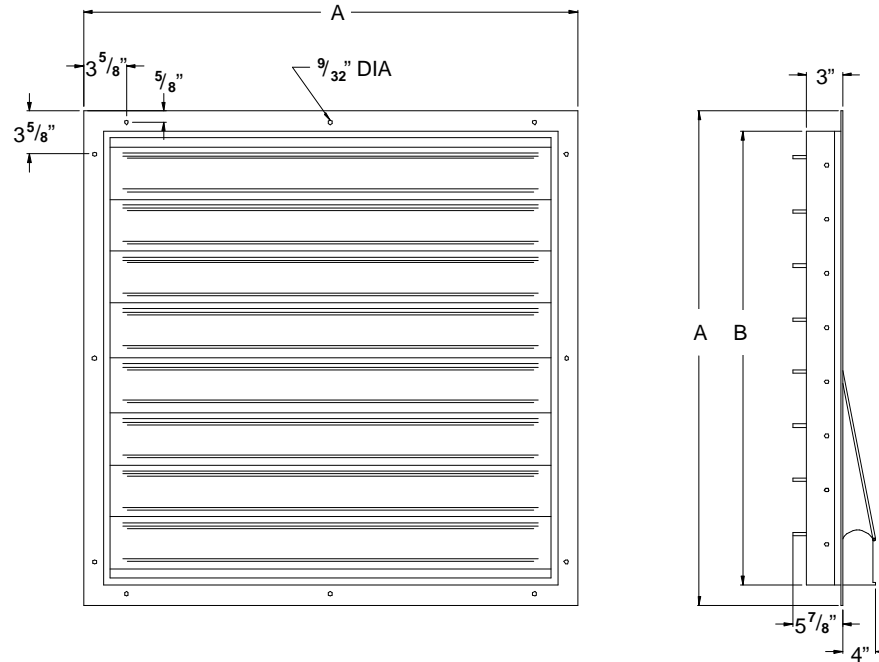

| Size | Max CFM | Shutter Model | DIMENSIONS IN INCHES | | Approx. Ship. Wt. Lbs. |
|--------|---------|---------------|----------------------|-----------------|------------------------|
| | | | A | B | |
| 7, 8 | 1,400 | SU7-8 | $13\frac{1}{2}$ | $10\frac{1}{4}$ | 5 |
| 10, 12 | 2,700 | SU10-12 | $17\frac{1}{2}$ | $14\frac{1}{4}$ | 10 |
| 14, 16 | 4,500 | SU14-16 | $21\frac{1}{2}$ | $18\frac{1}{4}$ | 15 |
| 18, 20 | 6,700 | SU18-20 | $25\frac{1}{2}$ | $22\frac{1}{4}$ | 19 |
| 24 | 9,000 | SU24 | $31\frac{1}{2}$ | $28\frac{1}{4}$ | 25 |

METAL GAUGE: Type SU models have 16 gauge aluminum frames and 24 gauge aluminum blades.